

AirOutshield Membranes


Vapor Permeable, Air Barriers for Sloped Roofs & Rain Screen Wall Systems

THE NEED

The most important factor in building durability is the control of moisture accumulation in wall and roof assemblies. Moisture intrusion can result in reduced insulation performance, interior deterioration, mold, and structural damage. Every year the building industry in North America spends billions of dollars in litigation and repairs related to moisture intrusion.

FUNCTION

SRP breathable membranes are multi-layer, spun bonded materials that control moisture intrusion and accumulation in the wall and roof assembly. SRP membranes resist water and air penetration while allowing water vapor to escape.

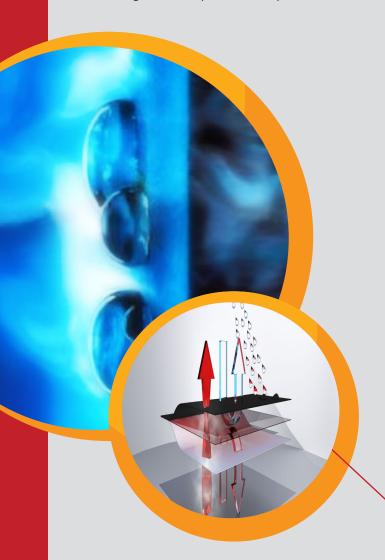

WHY CHOOSE SRP MEMBRANES?

Moisture Vapor Permeable

SRP membranes enable substrates and assemblies to dry, reducing potential for deterioration and mold.

Proven Performance

Since being introduced to North America in 2002, SRP membranes have been installed in hundreds of buildings with excellent results.

Water Resistant

SRP membranes form a water control layer that repels water that penetrates primary cladding or roof system.

Air Barrier

All AirOutshield membranes are rated as air barriers and the AirOutshield SA 280 Self Adhering Membrane has been tested as a complete Air Barrier Assembly in accordance with the CAN/ULC S741 and CAN/ULC S742 achieving the best rating of A1.

Durable

Tear and puncture resistance reduces repairs and associated labor costs.

Self Cinching

SRP membranes seal around fasteners, reducing the need for sealants.

High Temperature Resistance

The polypropylene (PP) composition provides superior resistance to high temperatures.

UV Resistant

AirOutshield membranes resist UV during construction and AirOutshield UV is designed for long-term UV exposure and is suitable with open joint cladding systems.

Lightweight

SRP products are lighter and easier to handle than asphalt based membranes.

Slip Resistant

The textured finish is slip resistant.


Versatile

SRP membranes can be installed behind most wall cladding systems and sloped roofs.

Systems Approach

SRP membranes are part of a complete system that includes compatible tapes and accessories.

Cross section, showing 3 distinct layers.

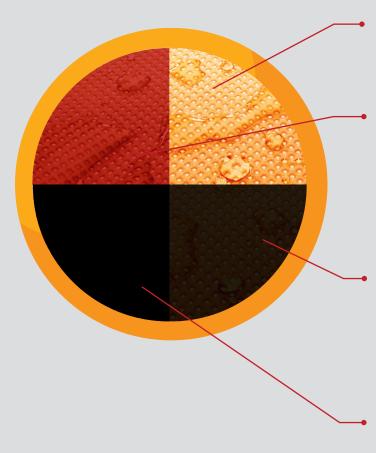

SRP AirOutshield WALL

A sheathing membrane, secondary drainage plane, water resistant barrier and air barrier behind rain screen wall cladding systems.

SRP AirOutshield SA 280

Self-adhered, water vapor permeable air barrier for rain screen walls and sloped roofing systems. Installed behind the primary water shedding surface, SRP AirOutshield SA 280 functions as the air barrier system sheathing membrane, water resistant barrier, secondary drainage plane, underlayment and slip sheet.

SRP AirOutshield ROOF

Installed in sloped roofing systems as a water vapor permeable air barrier and secondary drainage plane. Ideal for use in insulated, sloped roofs covered with metal, clay, cedar and other systems requiring an underlayment and/or slip sheet.


SRP AirOutshield UV

Black, unprinted air barrier with long-term UV resistance. Designed specifically for use with open-jointed rain screen cladding systems including slotted wood siding, panel systems, and other "open-joint" systems – where resistance to UV exposure is needed.

SELECTION CHART




SLOPED ROOF APPLICATIONS

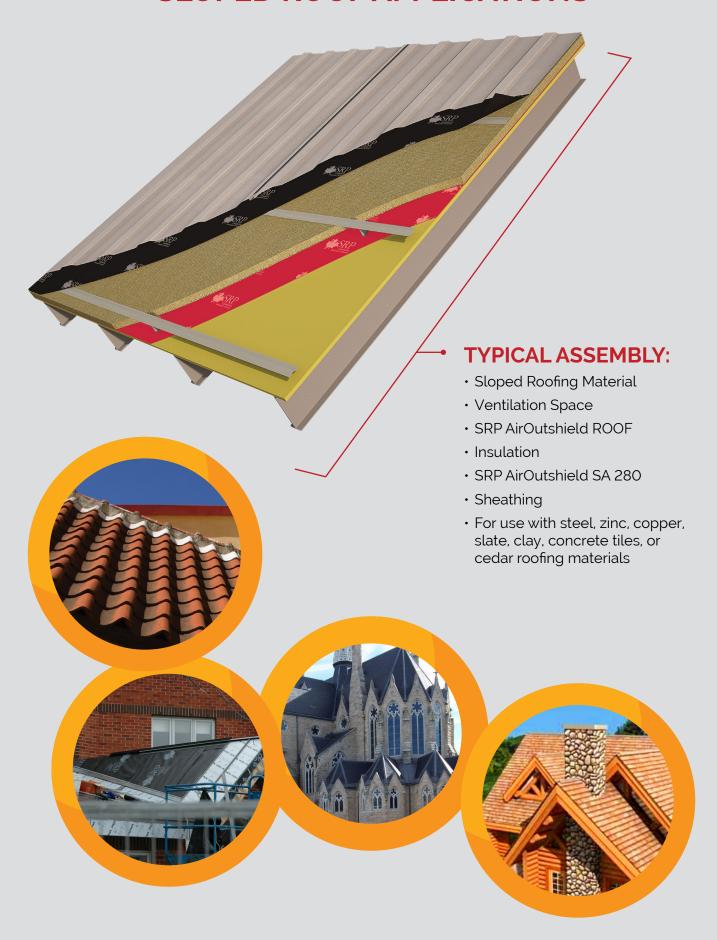

WALL APPLICATIONS



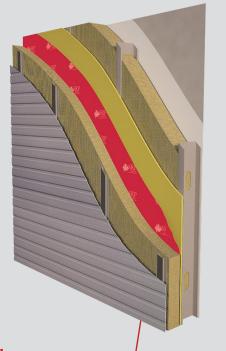



TYPICAL ASSEMBLY:

- Open-Jointed, Ventilated Rain Screen Cladding Systems
- Ventilation Space
- SRP AirOutshield UV (Black)
- Exterior Insulation
- · SRP AirOutshield SA 280
- Sheathing
- Framing, Insulation and Interior Vapor Barrier

TYPICAL ASSEMBLY:

- Cladding
- Ventilation Space
- Insulation
- AirOutshield SA 280 or AirOutshield WALL with SRP 60 UV Tape on all Seams
- Sheathing
- Framing, Insulation and Interior Vapor Barrier






ACCESSORIES

SRP 60 UV Seamseal Tape UV Resistant

Roll Size: 60mm x 25m (2.4" x 81')


Color: Black



SRP 100 UV Seamseal Tape UV Resistant, Split Liner

Roll Size: 100mm x 25m (4" x 81')

Color: Black



AirOutshield SA 280 Flashing 200

Ideal for detailing openings
For use with all AirOutshield Membranes

Roll Width: 200mm

Other widths available on request

Roll Length: 50m Color: Black


SRP TAPES AND FLASHINGS ARE AVAILABLE IN OTHER WIDTHS BY SPECIAL ORDER



Technical Data Sheets Installation Guides Guide Specifications Detail Drawings

RESOURCES

These items can be sourced from our website, www.SRPAirOutshield.com

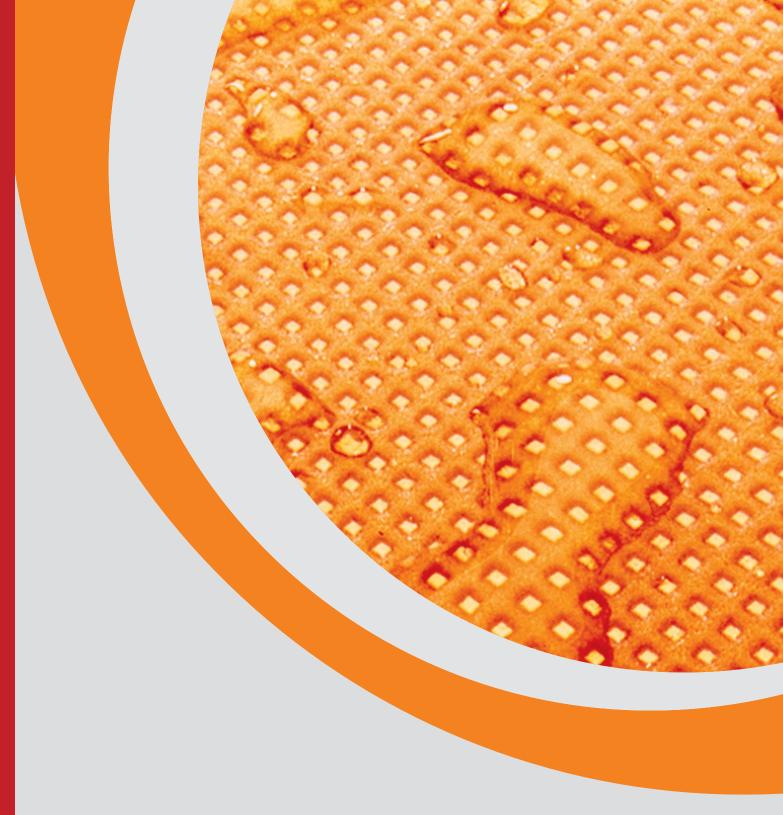

SRP AirOutshield Inc. products are available across the USA, Canada and Caribbean.

To purchase or to obtain pricing contact us at info@SRPAirOutshield.com or call 1-866-533-0233

Toll Free: 1-866-533-0233

Email: info@SRPAirOutshield.com

www.SRPAirOutshield.com

